


**1. PRODUCT NAME****Wood Elements Wall Base, 4" Cove****2. COMPANY INFORMATION**

Flexco Corporation  
 1401 East 6<sup>th</sup> Street  
 Tuscumbia, AL, USA 35674  
 Phone: (256) 383-7474; (800) 633-3151  
 Fax: (256) 381-0322; (800) 346-9075  
 Email: [info@flexcofloors.com](mailto:info@flexcofloors.com), [technical@flexcofloors.com](mailto:technical@flexcofloors.com)  
 Internet: [www.flexcofloors.com](http://www.flexcofloors.com)


**3. PRODUCT DESCRIPTION**

ASTM F 1861, Type TP, Group 2, Style B  
 Thermoplastic Rubber Formulation designed to meet or exceed the above-mentioned standard specification for Resilient Wall Base. Inside and Outside corners are available with a nominal 3" return.

WEC-XXX, 4" Cove



Available in 48" Lengths and 120' Coils

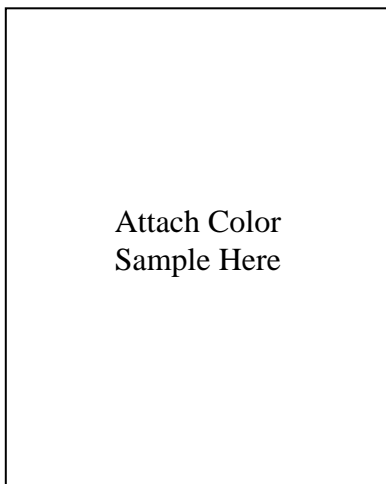**Color Sample:**Attach Color  
Sample Here**4. TECHNICAL DATA**

**ASTM E 84 (NFPA 255)** - Class B  
**ASTM E 648 (NFPA 253)** - Class 1  
**ASTM E 662 (NFPA 258)** - Passes  
**ASTM F 1861**- Meets or exceeds the requirements for heat & light aging, chemical resistance and dimensional stability

**5. LEED INFORMATION**

May contribute to LEED<sup>®</sup> CI and NC credits MR 4, MR 5 and MR 6. For detailed LEED information, see [flexco.ecoscorecard.com](http://flexco.ecoscorecard.com)

**6. INSTALLATION**

Maintain the installation area, wall base, and adhesive between 65° F and 85° F for at least 48 hours before installation, during installation, and after the installation. Use only on structurally sound interior wall surfaces such as dry plaster, cured drywall, exterior grade plywood, concrete and masonry that are clean, smooth, dry and structurally sound. All surfaces must be free from moisture, alkali, old adhesive, dust dirt, wax, oil, grease, loose paint or plaster, nonporous wall coverings or paints and other extraneous coatings or materials that could prevent a successful bond. Any rough or uneven surfaces may telegraph through the wall base. Refer to Wood Elements Wall Base Installation instructions for detailed information.

**7. ADHESIVES****Flexco 106 Wall Base Adhesive**

- Apply with 1/8" square notch trowel, adhesive spreader or disposable nozzle
- Coverage: approximately 200 linear feet of 4" Wood Elements Wall Base
- Contains Anti-Microbial Protection
- VOC's: < 1 g/L of material & coating

**8. PRODUCT MAINTENANCE**

Refer to Flexco Wood Elements Wall Base Maintenance Information for detailed instructions

**9. AVAILABILITY AND COST**

Products are available through Flexco distributors. Contact Flexco Customer Service or visit [www.flexcofloors.com](http://www.flexcofloors.com) for a list of distributors.

**10. LIMITED WARRANTY**

Limited One (1) Year Warranty

