


## #1776 RGT Design One-Piece Tread/Riser

### Manufacturer

Flexco Corporation  
1401 East 6th Street  
Tuscumbia, AL USA 35674  
Phone (800) 633-3151  
Fax (800) 346-9075  
Email: [info@flexcofloors.com](mailto:info@flexcofloors.com), [solutions@rhctechical.com](mailto:solutions@rhctechical.com)  
Internet: [www.flexcofloors.com](http://www.flexcofloors.com)

### Product Description

Surface Design: 1 1/4" (31.75 mm) Diameter Round Disk with Tapered Edges  
Safety Strip: 2" (50.8 mm) Carborundum, Ribbed or Smooth Rubber Inserts approximately 3/4" (19 mm) from Nose  
Nose Type: Adjustable Nose  
Nose Length: 1 9/16" (39.69 mm)  
Nose Thickness: 1/4" (6.35 mm)  
Back Thickness: 5/64" (1.98 mm)  
Tread Depth: 20 1/2" (520.7 mm)  
Use Rating: Heavy Duty  
Length: 36" (.91 m), 42" (1.07 m), 48" (1.22 m), 54" (1.37 m), 60" (1.52 m), 72" (1.83 m), 84" (2.13 m), 96" (2.44 m) & 108" (2.74 m)  
Matching Tile: Radial II (RGT)

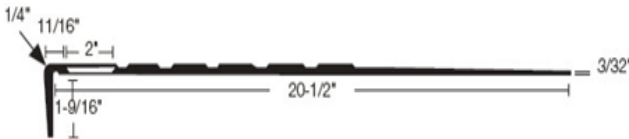

Attach  
color submittal sample here

### Technical Data

**ASTM F2169 – Resilient Stair Treads:** Type TS, Class 1 & 2, Group 1 & 2, Grade 1

**ASTM E648 (NFPA 253) - Critical Radiant Flux:** Class I, > 0.45 W/cm<sup>2</sup>

**ASTM E662 (NFPA 258) - Smoke Density:** Passes, <450

**CAN/ULC-S102.2 - Surface Burning:** Flame Spread Rating (FSR) 115, Smoke Developed Classification (SDC) 275

**ASTM F925 - Chemical Resistance:** Passes (chart available from [solutions@rhctechical.com](mailto:solutions@rhctechical.com))

**ASTM D2047 - Slip Resistance:** > 0.6

**Recommend Storage, Acclimation & Service Temperature:** 65° - 85° F

**Acclimation Time:** 48 Hours in Service Conditions

### Approved Adhesive\*

**AW-510 Acrylic Wet-Set Adhesive**  
**EN-610 Epoxy Nose Filler Adhesive**  
**C-630 Contact Adhesive**  
**TP-620 Pressure Sensitive Tape**  
**U-705 Urethane Wet-Set Adhesive**  
**EW-710 Epoxy Wet-Set Adhesive**

Select the appropriate adhesive for your installation, substrate and use. With any adhesive selection ensure that proper moisture and pH testing is performed and results are below the selected adhesive's limits. A bond test should be performed at least 72 hours prior to the scheduled installation to ensure the substrate is suitable.

### Installation\*

We recommend Flexco Rubber Stair Treads be installed by a competent Commercial Flooring Contractor which has previously demonstrated the capabilities to install Rubber Stair Treads.

We recommend the installer and/or project manager have completed some type of formal training, such as FCICA CIM Program, CFI, INSTALL and/or Manufacturer's (even competitors) training program.

To maintain full warranties for Flexco Rubber Stair Treads, all recommendations provided by Flexco must be followed. Failure to use Flexco recommended adhesives could result in voided product warranty.

### Maintenance

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

### LIMITED WARRANTY

Limited Five (5) Year Wear Warranty

*\*For complete adhesive, installation & maintenance instructions, visit [www.flexcofloors.com](http://www.flexcofloors.com). Refer to Flexco Installation Instructions and Technical Data Sheet and/or Flexco Rubber Stair Care and Maintenance Documentation for additional detailed information*